


for shoes midsole

Non-woven material based on synthetic fibres with polypropylene reinforcement, coated with latex. It has a very good tensile behaviours, stability and sewing resistance. It is particularly suitable for Strobel sewing shoes and PU injected

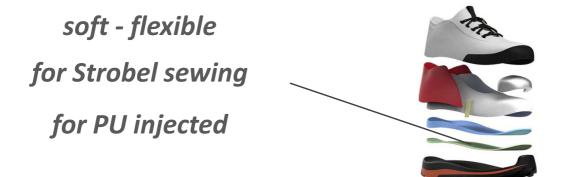

57 % Polyester 16% Polypropylene 27 % Latex

TEST	UNITS	STANDARD	TYPICAL VALUES
weight	gr/m <sup>2</sup>	UNI EN ISO 2286-2	610
thickness	mm	UNI ISO 2589	2,30
density	kg/m³		265
roll width	cm		150
roll lenght	lm		40

The mentioned data are average values resulted on standard products of ours. The results are obtained either by own Laboratory or by Official Laboratories and they follow both internal and international Standard Norms. They are typical and strictly confidential data

