


for insole purpose, is made of synthetic fibers

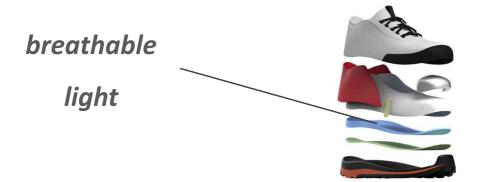

60% Recycled Polyester40% Standard Polyester

TEST	UNITS	STANDARD	TYPICAL VALUES
weight	gr/m²	UNI EN ISO 2286-2	230
thickness	mm	UNI ISO 2589	3,00
density	kg/m ³		76
roll width	cm		150
roll lenght	lm		50
roll diameter	cm		40

The mentioned data are average values resulted on standard products of ours. The results are obtained either by own Laboratory or by Official Laboratories and they follow both internal and international Standard Norms. They are typical and strictly confidential data

