


for shoes midsole

Non-woven material based on synthetic fibres with polypropylene reinforcement, coated with latex. It has a very good tensile behaviours, stability and sewing resistance. It is particularly suitable for Strobel sewing shoes and PU injected

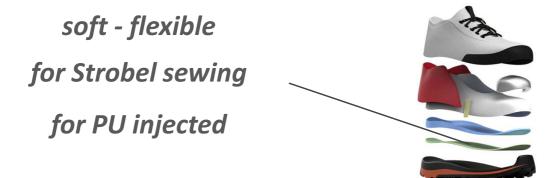

40% Polyester 16% Polypropylene 44% Latex

| TEST | UNITS | STANDARD | TYPICAL VALUES |
|-------------|-------------------|-------------------|----------------|
| weight | gr/m² | UNI EN ISO 2286-2 | 500 |
| thickness | mm | UNI ISO 2589 | 1,50 |
| density | kg/m ³ | | 333 |
| roll width | cm | | 150 |
| roll lenght | lm | | 45 |

The mentioned data are average values resulted on standard products of ours. The results are obtained either by own Laboratory or by Official Laboratories and they follow both internal and international Standard Norms. They are typical and strictly confidential data

