


# SAFETY 2020

for shoes midsole

Non-woven material based on synthetic fibres with polypropylene reinforcement, impregnated with latex. It has a very good tensile behaviours, stability and sewing resistance. It meets the EN20344 requirements and it can be used for antistatic and safety shoes, it's suitable for ESD shoes too

**antistatic**  
**for Strobel sewing**

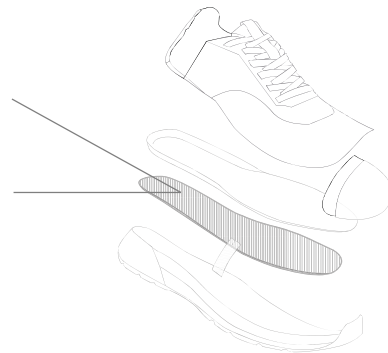

41% Polyester  
12% Polypropylene reinforcement  
47% Latex

TEST	UNITS	STANDARD	TYPICAL VALUES
weight	gr/m <sup>2</sup>	UNI EN ISO 2286-2	800
thickness	mm	UNI ISO 2589	2,00
density	kg/m <sup>3</sup>		400
sheet dimension	cm		110x150
sheets x pallet	n°		450

*The mentioned data are average values resulted on standard products of ours. The results are obtained either by own Laboratory or by Official Laboratories and they follow both internal and international Standard Norms. They are typical and strictly confidential data*